
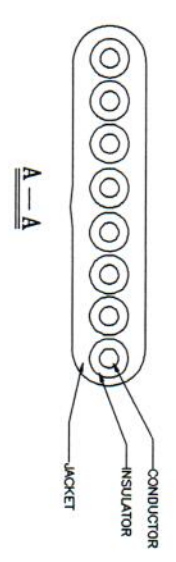


RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

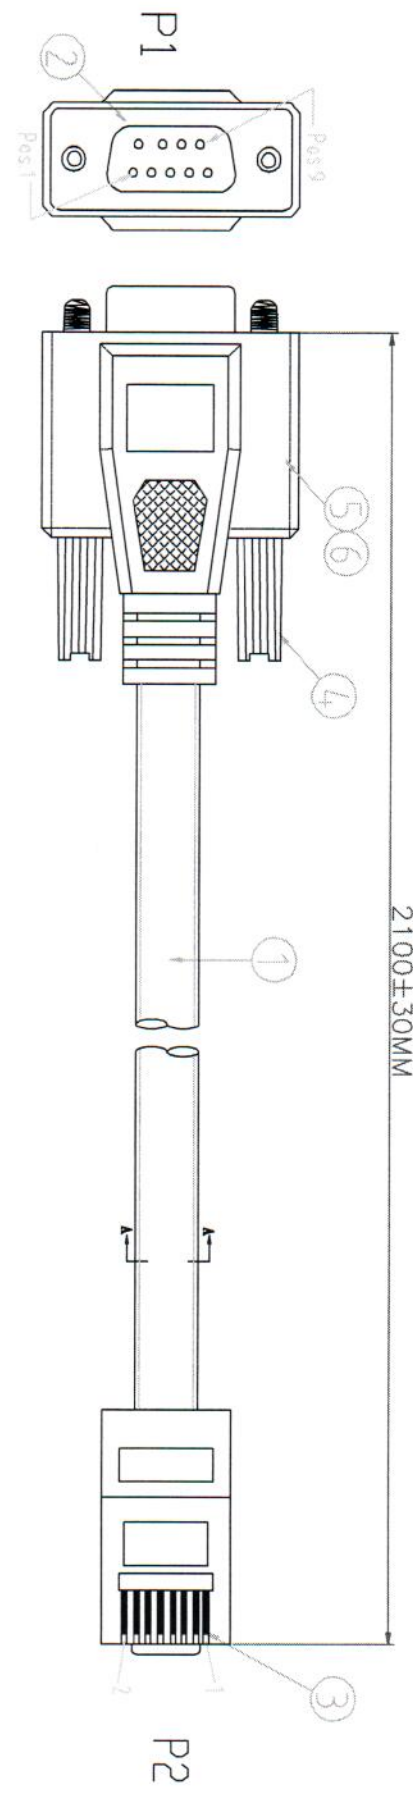

NOTES:  
 1:100% short,open and miss wire test.  
 2:Insulation resistance:DC300V 10MΩ(Min)  
 Conduction resistance 5Ω(Max)

⑥	OUTER MOLDED	45P PVC,COLOR:pantone 17-4435 tpx	0.024	KG
⑤	INNER MOLDED	LDPE	0.024	KG
④	SCREW	#4-40UNC 2.3*45.5MM,PVC COLOR:pantone 17-4435 tpx	4	PCS
③	CONNECTOR	UTP CAT.5E 8P8C TRANSPARENT PC HEAD,THE PIN GOLD GOLD PLATED	1	PCS
②	CONNECTOR	DB 9PIN/FEMALE,BLUE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	FLAT CABLE:8C*26AWG,JACKET:PVC,COLOR:pantone 17-4435 tpx,0D:2.7*8.8±0.2	2100	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

P1	PIN	OUT	P2
8	_____	_____	1
6	_____	_____	2
2	_____	_____	3
5	_____	_____	4
5	_____	_____	5
3	_____	_____	6
4	_____	_____	7
7	_____	_____	8

Itemref	Quantity	Title/Name,designation,material,dimension etc	File name	Article No./Reference
Designed by		Checked by	Approved by - date	Date
ANGLE:			DEC 14, 2016	DEC 14, 2016
UNIT:MM			DB9PIN F TO RJ45,26AWG,pantone T-4435 tpx,2,1M	32 0386
				1
				Sheet
				1/1